

Z 600 Multi-function ladder, 3-part

One ladder, six functions: the flexible solution for safe ascent and descent, plus extra-high stability.

- Upper ladder with top wheel assembly (from size 3 × 8).
- Can be used on steps/stairs.
- Top and middle sections with rung hooks and rung locks.
- High-strength Perlon belts with sewn-in fixing straps prevent splay.
- Optimum wrap-around stile guide that encompasses the whole rung.
- Rung hooks and guide fittings are bolted in and can therefore be replaced.
- Replaceable 2-component plastic end caps ensure positioning without risk of slipping and at the same time provide firm seating in the stile.



ZARGES tip

Optimum stability due to extra-wide horizontal stabiliser bar and two rigid locking bars.

Optional special equipment (see also page 196/197)

Ladder length as 3-part single ladder m	Length as 2-part single ladder and as stepladder with push-on part m	Ladder length, retracted m	Max. working height as 3-part single ladder, approx. m	Stile height mm	Horizontal stabiliser bar m	Number of rungs	Weight kg	Order No.
4.15	3.00	1.90	4.91	68	0.80	3 × 6	13.8	41526
4.95	3.60	2.20	5.72	68	0.80	3 × 7	16.2	41527
5.80	4.10	2.45	6.54	73	0.90	3 × 8	18.5	41521
6.65	4.70	2.75	7.35	73	0.90	3 × 9	20.8	41529
6.90	4.95	3.00	7.63	73	1.00	3 × 10	24.3	41522
8.60	6.10	3.55	9.26	98	1.10	3 × 12	30.1	41523
9.70	6.95	4.15	10.35	98	1.20	3 × 14	38.4	41524

Z 500 Multi-function ladder, 3-part

The basic version offers high functionality and flexibility and an excellent price/performance ratio.

- Can be used on steps/stairs.
- One rigid locking bar.
- Top and middle sections with rung hooks and rung locks.
- High-strength Perlon belts with sewn-in fixing straps prevent splay.
- Optimum wrap-around stile guide that encompasses the whole rung.
- Rung hooks and guide fittings are bolted in and can therefore be replaced.
- Replaceable 2-component plastic end caps ensure positioning without risk of slipping and at the same time provide firm seating in the stile.
- Rungs and stiles made from aluminium extrusions.




For more information on product features and quality, see the Service section starting on page 336.

Optional special equipment (see also page 196/197)

Ladder length as 3-part single ladder m	Length as 2-part single ladder and as stepladder with push-on part m	Ladder length, retracted m	Max. working height as 3-part single ladder, approx. m	Stile height mm	Horizontal stabiliser bar m	No. of rungs	Weight kg	Order No.
5.80	4.10	2.45	6.54	73	0.80	3 × 8	18.5	41538
6.90	4.95	3.00	7.63	73	0.90	3 × 10	24.3	41540
8.60	6.10	3.55	9.26	98	1.00	3 × 12	30.1	41542
9.70	6.95	4.15	10.35	98	1.20	3 × 14	37.4	41544

Компресор мобилни AIRCRAFT Airstar 401/50

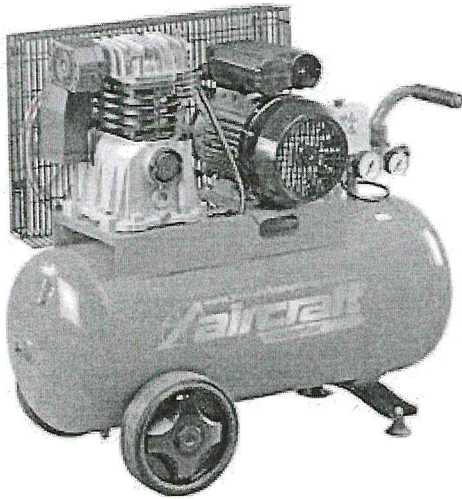

Максимална проток 360-370л/мин
Капацитет пуњења 260-270л/мин
Запремина најмање 50лит
Снага мотора 2,2kW
Притисак 10 bar
Број обртаја 1350-1400 1/мин
Погон за ременице и 2-цилиндрична јединица од сивог лива
Велики вентилатор и вентилациони вентил на цилиндру за оптимално хлађење компресора
Електромотор са високим обртним моментом
Електрични мотор опремљен прекидачем за заштиту мотора
Хладњак који обезбеђује малу улазну температуром и тиме смањује влагу у компримованом ваздуху
Резервоар за компримовани ваздух опремљен сигурносним вентилом, манометром и вентилом за одвод кондензата
Ниво буке 94 dB(A)
AIRCRAFT Airstar 401/50

TORANJ LAMPE

AMBIJENTALNA SVETLA

RUČNE LAMPE



2000 lumen

POSTA-VLJANJE ZA 5 SEKUNDI

1,10 m



3000 lumen

POSTA-VLJANJE ZA 5 SEKUNDI

2,13 m

1,10 m



3000 lumen

POSTA-VLJANJE ZA 5 SEKUNDI



1000 lumen

IP54

M12 AL-0
4933451394
15.750 Din. bez PDV-a



1500 lumen

IP54

M18 AL-0
4933451392
17.312,50 Din. bez PDV-a



3000 lumen

IP54

M18 HAL-0
4933451282
37.825 Din. bez PDV-a



1500 lumen

NOVO IP54

M18 PAL-0
4933464105
20.572,50 Din. bez PDV-a



120 lumen

IP54

M12 TLED-0
4932430360
5.447,50 Din. bez PDV-a



400 lumen

IP24

M12 LL-0
4932430582
9.292,50 Din. bez PDV-a



300 lumen

IP24

M18 IL-0
4932430584
10.087,50 Din. bez PDV-a



160 lumen

IP54

M18 TLED-0
4932430361
5.562,50 Din. bez PDV-a



1350 lumen

IP54

M12 UHL-0
4933459432
22.500 Din. bez PDV-a



300 lumen



300 lumen

IP54

M18 HSL-0
4933451392
64.500 Din. bez PDV-a

IP24

M18 HSL-0
4933451392
77.400 Din. bez PDV-a



Self-Propelled Scissor Lifts

GS™-2046, GS-2646 & GS-3246

Features

Standard Features

Measurements

GS-2046

- 26 ft (8.10 m) working height
- Up to 1,200 lbs (545 kg) lift capacity

GS-2646

- 32 ft (9.92 m) working height
- Up to 1,000 lbs (454 kg) lift capacity

GS-3246

- 38 ft (11.75 m) working height
- Up to 700 lbs (318 kg) lift capacity

Productivity

- 89 x 45.3 in (2.26 x 1.15 m) steel platform
- 36 in (.91 m) extension deck
- Folding rails with full height swing gate
- Dual front wheel drive
- Universal 20 amp smart charger
- Rear recessed charger receptacle
- SmartLink™ - 2 speed lift and proportional drive
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Brake release
- Swing-out component trays
- Solid non-marking tires
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter

Power

- 24 V DC (four 6 V 225 Ah batteries)


Options & Accessories

Productivity Options

- Air line to platform
- Dual flashing beacons
- Motion alarm
- Automotive horn
- Biodegradable hydraulic fluid

Power Options

- Power inverter (120 V/60 Hz)
- EE rating
- AGM maintenance-free batteries

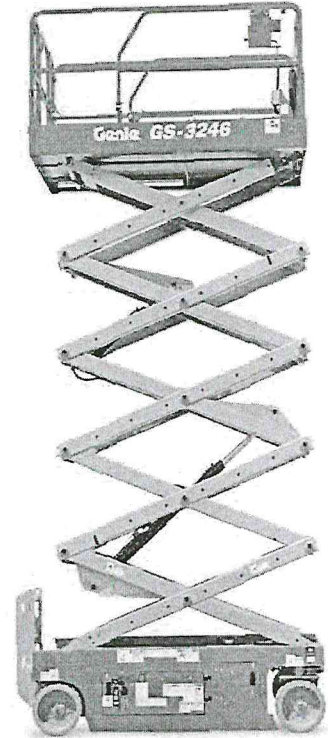

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By:



www.onesourcerental.com

Effective Date: January, 2014. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2014 Terex Corporation.

GS46 0210H, Part No. 109379

www.genielift.com



Self-Propelled Scissor Lifts

GS™ -2046, GS-2646 & GS-3246

Distributed By:



www.onesourcerental.com

Specifications

Models	GS-2046		GS-2646		GS-3246	
Measurements	US	Metric	US	Metric	US	Metric
Working height maximum*	26 ft	8.10 m	32 ft	9.92 m	38 ft	11.75 m
▲ Platform height maximum	20 ft	6.10 m	26 ft	7.92 m	32 ft	9.75 m
▲ Platform height stowed	3 ft 4.8 in	1.04 m	3 ft 9.6 in	1.16 m	4 ft 2.75 in	1.29 m
▲ Platform length - outside	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m
extended	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m
Slide-out platform extension deck	3 ft	.91 m	3 ft	.91 m	3 ft	.91 m
▲ Platform width - outside	3 ft 9.3 in	1.15 m	3 ft 9.3 in	1.15 m	3 ft 9.3 in	1.15 m
Guardrail height			3 ft 7 in	1.09 m	3 ft 7 in	1.09 m
Toeboard height	6 in	.15 m	6 in	.15 m	6 in	.15 m
▲ Height - stowed: folding guardrails	7 ft	2.13 m	7 ft 5 in	2.26 m	7 ft 10 in	2.39 m
rails folded	5 ft 1 in	1.55 m	5 ft 6 in	1.68 m	5 ft 11 in	1.80 m
▲ Length - stowed	7 ft 11 in	2.41 m	7 ft 11 in	2.41 m	7 ft 11 in	2.41 m
extended	10 ft 10.5 in	3.31 m	10 ft 10.5 in	3.31 m	10 ft 10.5 in	3.31 m
▲ Width	3 ft 10 in	1.17 m	3 ft 10 in	1.17 m	3 ft 10 in	1.17 m
▲ Wheelbase	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m
▲ Ground clearance - center	4 in	.10 m	4 in	.10 m	4 in	.10 m
▲ - with pothole guards deployed	.75 in	.019 m	.75 in	.019 m	.75 in	.019 m

Productivity

Maximum platform occupancy**	4	4	3	3	2	2
Lift capacity	1,200 lbs	544 kg	1,000 lbs	454 kg	700 lbs	318 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability - stowed	***	30%		30%		25%
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m
Raise / lower speed	30 / 33 sec	30 / 33 sec	30 / 38 sec	30 / 38 sec	57 / 35 sec	57 / 35 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tires - solid non-marking	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm

Power


Power source	24 V DC (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	3.75 gal	14.2 L	3.75 gal	14.2 L	4.5 gal	17 L

Weight****

ANSI/CSA	3,977 lbs	1,804 kg	4,312 lbs	1,956 kg	5,211 lbs	2,364 kg
CE/AUS	4,351 lbs	1,974 kg	5,395 lbs	2,447 kg	6,200 lbs	2,812 kg

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

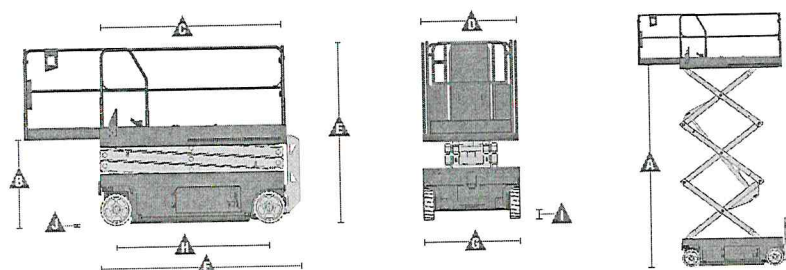

www.genielift.com

- * The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
- ** CE/AUS markets: Two person maximum occupancy on all models. GS-3246 outdoor maximum occupancy is one person.
- *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
- **** Weight will vary depending on options and/or country standards.

Z 600 Tanker ladder



Safe access for servicing, repairing, filling and cleaning road tankers and tank wagons.

- Areas of application: food industry, chemical and petrochemical industries, rail vehicles.
- Simple height adjustment in 280 mm increments by means of two-part push-up ladder and a cable winch.
- Ladder with rungs 30 mm deep made from aluminium extrusion.
- Strong ZARGES quality triple-formed joints connecting rung and stile.
- Possible platform heights from 2,770 mm to 4,100 mm.
- Double-sided handrail on the push-up ladder for maximum safety when climbing.
- Round or rectangular guardrail.
- Easily moved by hand via chassis with two fixed and swivel castors.
- Different chassis versions available depending on requirements.
- Optionally with 600 mm wide platform in three different lengths.
- Platform surface serrated aluminium.
- The maximum load for the ladder is 150 kg.

If you are unable to meet your requirements with the existing modular system, we design and produce special solutions on request (see also from p. 310).




Note:

Example order (see illustration above)


- 1 × 591000 Basic module ladder, height-adjustable from 2,770 mm to 4,100 mm
- 1 × 591004 Guardrail, round
- 1 × 591010 Standard chassis




For more information on product features and quality, see the Service section starting on page 336.

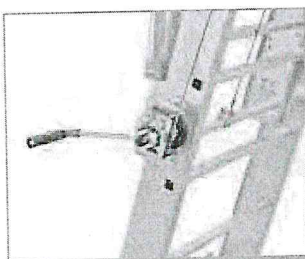

Height adjustment via external cable winch

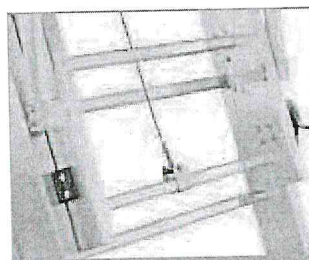

Height adjustment in rung grid of 280 mm

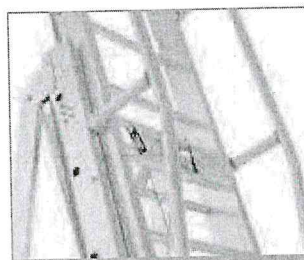


Double-sided handrail on the access steps



Entry platform with two swivel castors

- Pruža do 1356 Nm moment stezanja u kom 213 mm, koje omogućava lakši pristup na s
- 4-Modni DRIVE CONTROL™ omogućava ko između 4 različita podešavanja brzine i mon svestranosti primene
- Mod 4 za odvijanje, pruža maksimalni mom



Inventar funkcija pruža potpuno upravljanje vašom kompletnom flotom alata

RASPOLOŽIVI U ASORTIMANU:

ONEKEY



M18 FUEL



M18 ONEFHWP12-502X

M18 ONEFHWF12-502X

M18 ONEFHWF34-502X

Prilivati alata	1/2" četvrtka sa pinom	1/2" četvrtka sa frakcionim prstenom	3/4" četvrtka sa frakcionim prstenom
Slobodna brzina (o/min)	0-950/0-1500/0-1800/0-1800	0-550/0-1400/0-1750/0-1750	0-800/0-1300/0-1800/0-1800
Broj udara (u/min)	0-1150/0-2100/0-2400/0-2400	0-950/0-1750/0-2100/0-2100	0-850/0-1850/0-2400/0-2400
Maks. moment (Nm)	1017	1356	1627
Maks. moment odvijanja (Nm)	1491	1898	2034
Artikal br.	4933459725	4933459727	4933459730
Cena bez PDV-a	78.552,00 Din.	78.552,00 Din.	78.552,00 Din.
Cena sa PDV-om	94.263,00 Din.	94.263,00 Din.	94.263,00 Din.

REDLITHIUM-ION™ 5.0Ah

NABAVITE PRAV



10 KOM
SHOCKWAVE™
UDARNI 1/2"
SET NASADNIH
KLJUČEVA
ART.# 4932352861

11.412,50 Din. bez PDV-a
13.695,00 Din. sa PDV-om

M18 BIW12-402C	Samo sa klinom	Sa k
	18	
	4.0	
	1/2" četvrtka	
	0-2450	170
	0-3350	240
	240	
	1,9	
	4933443807	
	53.555,00 Din.	
	64.266,00 Din.	8

ДРУГО 7.

LDM 100 | 100 m Laser distance meter

Article: 4933459278




- Easy to use one person point and shoot system.
- Built-in 3-position auto-reference fold out pin for easy in corner/edge measurements.
- Auto shut off and low power indication.
- Slim housing for easy handling and nylon carry pouch for safe transport.
- IP54 water & dust protection.
- Metric & Imperial units of measurement.
- Easy to touch measure buttons on the front and side of the housing to perform single measurements & continuous tracking.

	LDM 100
Accuracy	± 1,5
Article Number	4933459278
Auto-level measurements	Yes
Battery type	2 x AAA
Dimensions (mm)	113 x 48 x 31
Display size (mm)	31,5 x 40
Height tracking	Yes
Inclination sensor	Yes
IP protection class	54
Laser classification	Class 2
Max. measurement range (m)	100
Pythagoras function	Yes
Range (m)	0.15 - 100
Supplied in	-
Weight with battery pack (kg)	0.14

Ласер за нивелацију METRICA 3D 61400

65% 09:31


LASER / SELF-LEVELING LASER / SELF-LEVELING LASER METRICA 3D / 3D GREEN

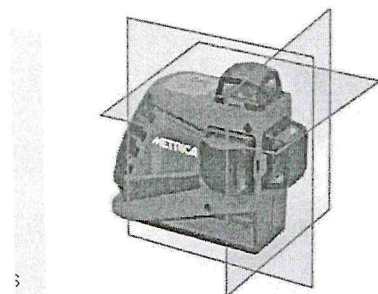

SELF-LEVELING LASER METRICA 3D / 3D GREEN

Ref.					
61400		8001066614004	1	0	
61410		8001066614103	1	0	


More Views



Капацитет 30м, домет са пријемником 50м, прецизност нивелисања $\pm 2\text{мм}/10\text{м}$
 црвени самонивелишући ласер класе II
 пројектује 3 ласерске равни 360° (хоризонталну и две вертикалне равни у односу
 90° једна према другој)
 4 квадрата на зидовима
 2 крста, један на плафону, други на земљи ван базе уређаја
 оптичка стакла
 висока видљивост
 лако позиционирање за плафон ($< 2\text{цм}$)
 за унутрашњу и спољну употребу
 аутоматско трептање ласера уколико је уређај изван самонивелишућег опсега
 интегрисани систем закључавања ради превенције вибрација током транспорта
 могућност пројектовања ласера са фиксираним нагибном позицијом
 неклизајући гумени штитник
 Li-ion пуњива батерија, резервна батерија и екстерни пуњач
 заштита IP 54
METRICA 3D 61400

Примор 9.

M18 FFSDC13-0 |
SAMOSTOJEĆI ČISTAČ ODVODA - 13 MM

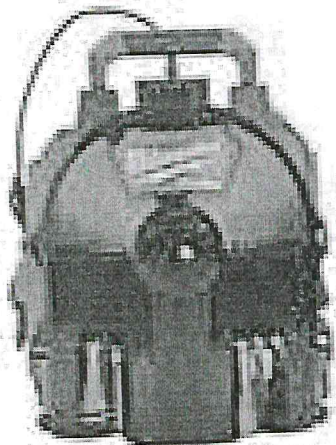

PRIBOR ZA ČISTAČ ODVODA

- a. Doboš za čistač odvoda 4932464277
- b. 8 mm x 23 m spiralno kuglasto svrdlo 48532772
- b. 10 mm x 15 m spirala M18FS 48532773
- b. 13 mm x 15 m spirala M18FS 48532774
- b. 16 mm x 15 m spirala M18FS 48532775
- c. Levkasta glava za izvlačenje M18FS 48532786
- d. Drop glava M18FS 48532787
- e. 38 mm Srcast bit M18FS 48532788
- f. 38 mm Sekač masti M18FS 48532789
- g. M18FS čistači odvoda 5 kom Set 48532790

DP 10.2

PH 27X BUŠILICA-ČEKIĆ SDS+ 800W 2.8J


- najkompaktniji, čekić dostupan u svojoj klasi
- motor od 800 W kombinovan sa optimizovanom brzinom bušenja pruža neprevaziđene performanse bušenja
- izuzetne performanse sa 2.8 J udarnom energijom i 4800 udara u minuti
- najniži nivo vibracija u klasi 11.4 m/s²
- inovativna i patentirana tehnologija za smanjenje težine
- funkcija zaustavljanja čekića
- sigurnosno kvačilo štiti korisnika i mašinu u slučaju zaglavljenja alata
- FIXTEC adapter za brzo menjanje između SDS+ i 13mm samostežuće stezne glave koje dolaze uz mašinu
- izdržljivi gumeni kabl 4m
- isporučuje se u koferu



Snaga motora	800 W
Prihvata alata	SDS+
Udarana energija	2.8 J (EPTA)
Broj udara	0 - 4800 u/min
Brzina	0 - 1300 o/min
Bušenje (beton/čelik/drvo)	26/13/30 mm
Vibracije bušenje / štemovanje	11.4 / 10.2 m/s ²
Težina	3.0 kg
Šifra artikla	4933448470

MDE 41 ELEKTROMAGNETNA BUŠILICA 41mm

- snažan motor od 1200 W sa optimizovanom brzinom bušenja
- 2-brzinski prenos sa optimizovanim brojem obrtaja 475 i 730 /min kod bušenja frezerima i spiralnim burgijama
- AUTOSTOP detekcija odizanja postolja: Detektuje prekomernu rotaciju i automatski isključuje napajanje bušilice radi zaštite korisnika
- elektro magnet sa silom od 9930 N
- maksimalni kapacitet bušenja do 41mm sa frezerima i do 13 mm sa burgijama
- samostežuća 19 mm Weldon glava za brzu i laku zamenu alata
- hod 146 mm za rad sa različitim priborom
- brzo izmenljiv rukohvat za rad levom i desnom rukom
- LED lampa za osvetljenje radne površine
- isporučuje se u koferu

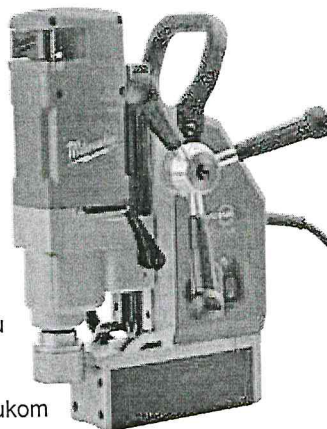

Snaga motora	1200 W
Brzina	475 / 730 o/min
Kapacitet bušenja frezerom	41 mm
Max. dubina bušenja frezerom	50 mm
Bušenje spiralnom burgijom	13 mm
Sila magnetnog postolja	9930 N
Težina	13.5 kg
Šifra artikla	4933451015

PD2E 24 RST BUŠILICA VIBRACIONA 1200W

- vrlo snažan motor od 1200 W
- elektronika sa varijabilnim izborom brzine i funkcijom promene smera
- AVS (Anti-Vibracioni-Sistem) i mek rukohvat za udobniji rad
- podešavanje obrtnog momenta
- metalni sistem prenosa za izuzetnu izdržljivost
- direktno prijem bitova za smanjenu dužinu i težinu uz najbolju preglednost tokom šrafljenja
- sigurnosno kvačilo za zaštitu korisnika
- samostežuća stezna glava 1.5 - 13 mm
- 4 m kabla
- isporučuje se u koferu



Snaga motora	1200 W
1 Brzina	0 - 1450 o/min
2 Brzina	0 - 3400 o/min
Bušenje (beton/ zid/ čelik/ drvo)	22/24/16/45 mm
Obrtni moment	56 Nm
Stezna glava	13 mm
Težina	3.1 kg
Šifra artikla	4933380796




ČEKIĆ-BUŠILICA SDS-MAX 1100 W 7,5 J



KARAKTERISTIKE:

- Meki start za precizan početak bušenja / štemovanja
- Roto-stop i multi-poziciona funkcija dleta
- Variolock (12 pozicija) za biranje odgovarajućeg ugla delta
- Broj udara 3000 u/min
- Bušenje (beton / tunel burgija / kruna) 45 / 65 / 100 mm
- Kabl 4 m
- Isporučuje se u koferu

WÖHLER

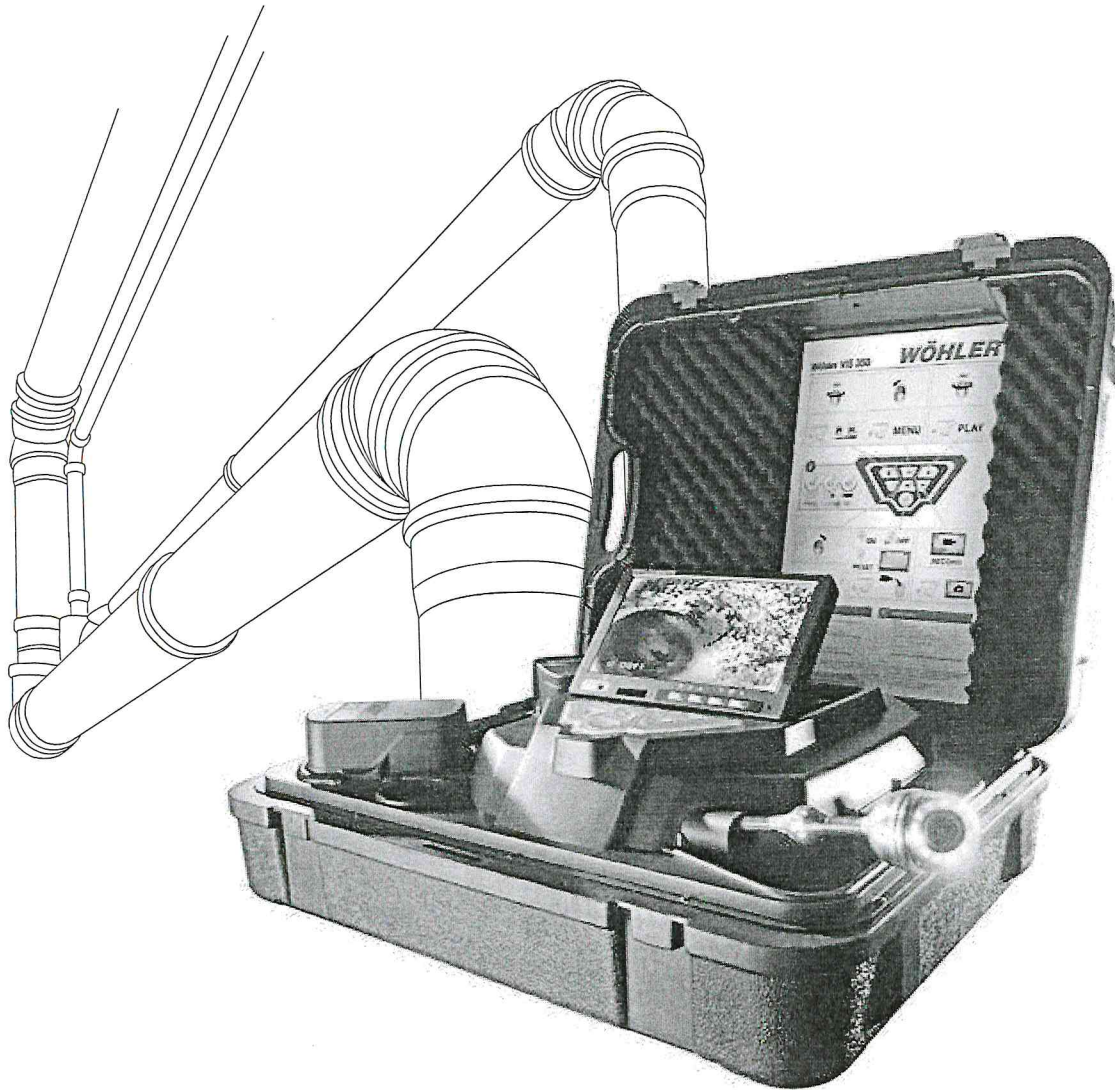

UNIQUELY CLEAR VIEW


Wohler VIS 350 Visual Inspection System

Video inspection, position indicator, home function and locator

The Measure of Technology



Made in
Germany

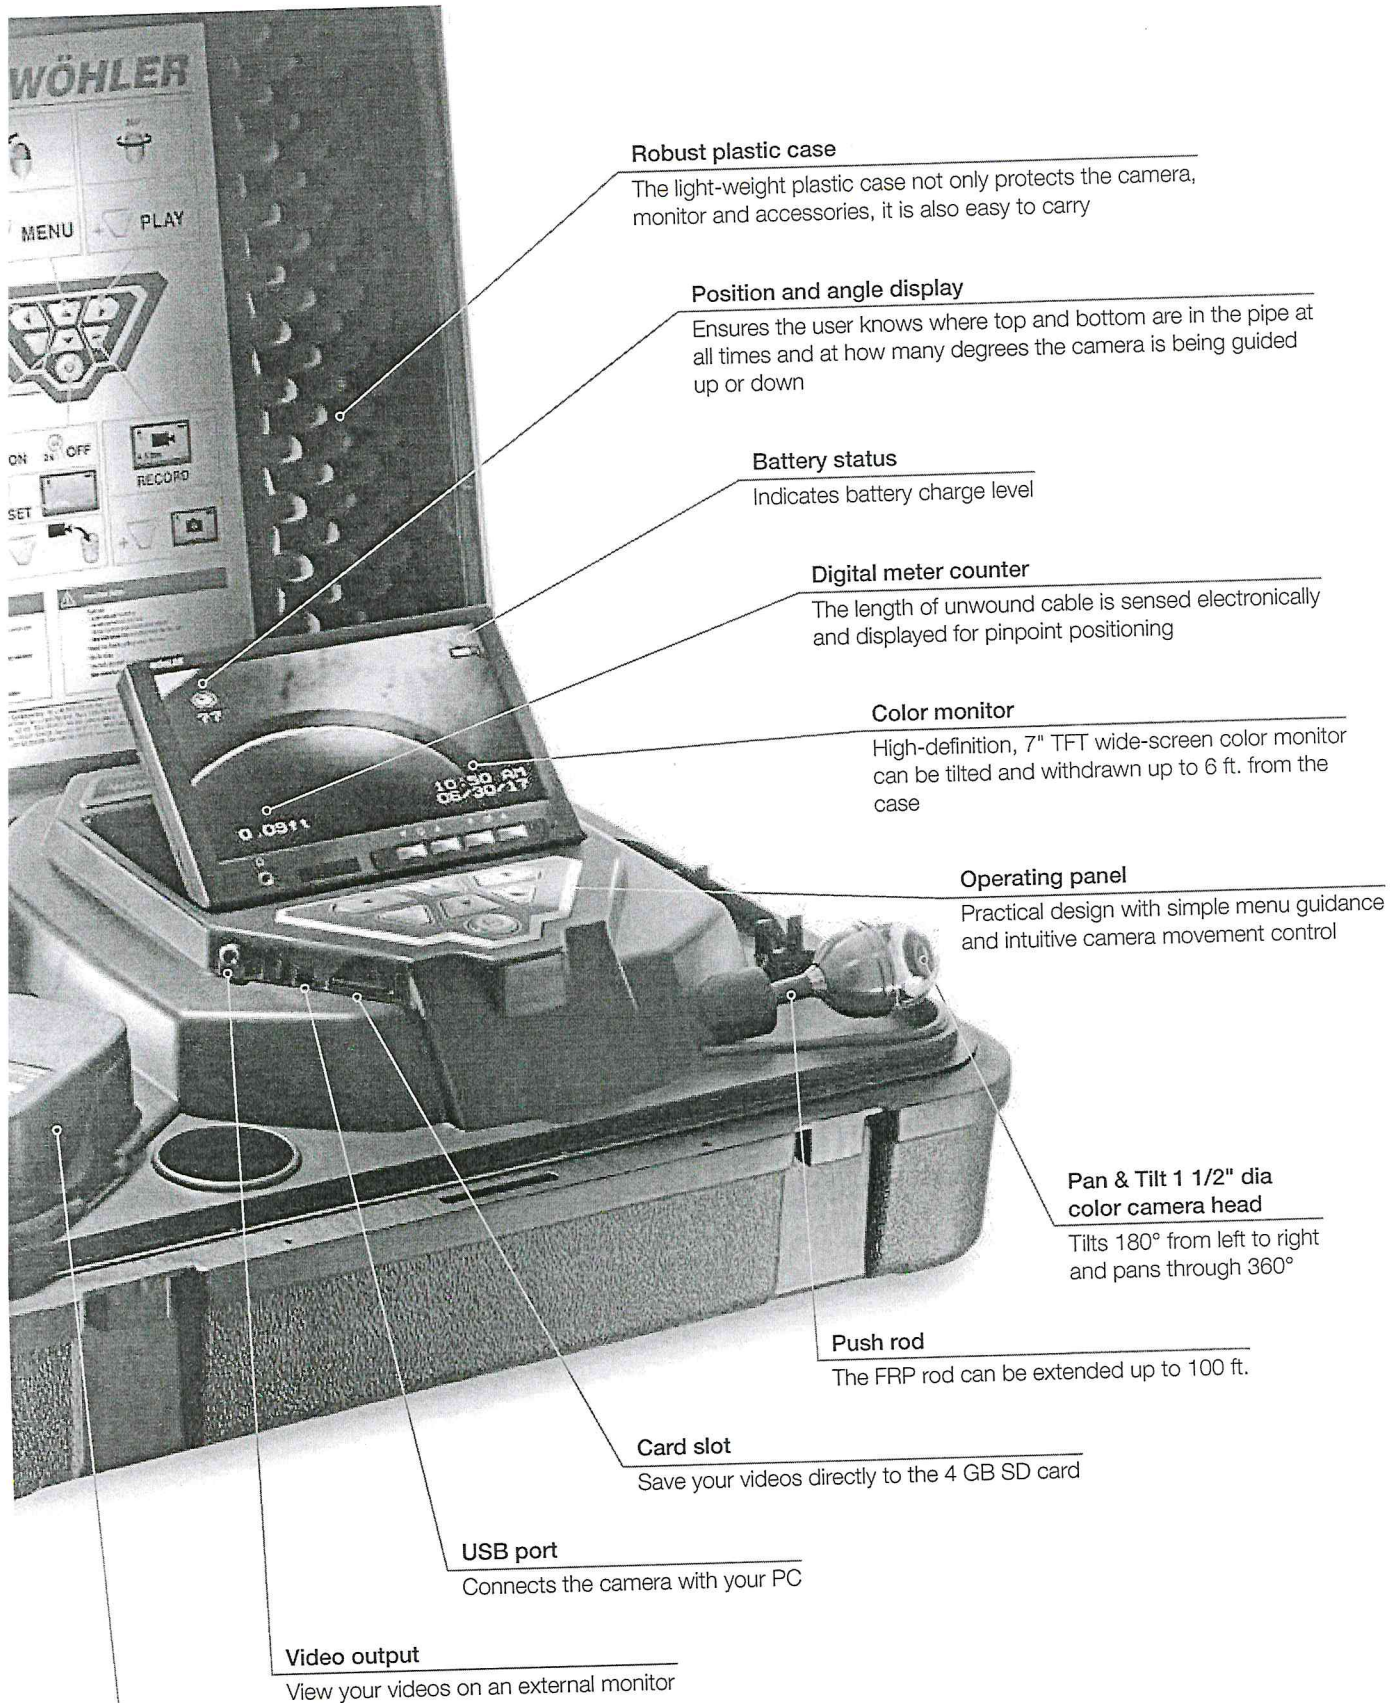

Robust plastic case

The light-weight plastic case not only protects the camera, monitor and accessories, it is also easy to carry

Position and angle display

Ensures the user knows where top and bottom are in the pipe at all times and at how many degrees the camera is being guided up or down

Battery status

Indicates battery charge level

Digital meter counter

The length of unwound cable is sensed electronically and displayed for pinpoint positioning

Color monitor

High-definition, 7" TFT wide-screen color monitor can be tilted and withdrawn up to 6 ft. from the case

Operating panel

Practical design with simple menu guidance and intuitive camera movement control

Pan & Tilt 1 1/2" dia color camera head

Tilts 180° from left to right and pans through 360°

Push rod

The FRP rod can be extended up to 100 ft.

Card slot

Save your videos directly to the 4 GB SD card

USB port


Connects the camera with your PC

Video output

View your videos on an external monitor

2 powerful rechargeable batteries

Space to store 2 rechargeable NiMH batteries (12 V) - each with a rechargeable, operating battery life of up to 2 hours - the main battery is charged in the case




Data-logger-luksometar PRO-2005LX

Uređaj za mjerenje osvjjetljenja sa internim spremnikom podataka, sučeljem i softwareom

Data-logger-luksometar za lukse i footcandle sa spremnikom podataka za 16.000 mjernih vrijednosti. Luksometar sadrži 4 mjerna područja: do 200 luksa, do 2.000 luksa, do 20.000 luksa i do 100.000 luksa. Točnost luksometra iznosi $\pm 4\%$ i omogućava točno utvrđivanje svjetlosnih uvjeta. Luksometar je idealan za ocjenu radnog mjesta, za osvjetljenje izložbenih prozora i vitrina i za optimiranje kompjutorskih radnih mjesta. Daljnje prednost luksometra PRO-2005LX je mogućnost mjerenja različitih izvora svjetla kao što su: normalno svjetlo (Wolfram, dnevno svjetlo 2856K), lampe sa plemenitim plinovima, lampe sa natrijskom parom i lampe sa živinom parom. Mjerna vrijednost se prikazuje u luksima ili ft-Candle.

- Interni spremnik podataka za 16.000 mjernih vrijednosti
- Interval pospremanja podesiv između 2 sekunde i 9 sati
- Luks ili FootCandle
- Senzor: Silicon-foto-dioda
- Vrsta izvora svjetla odabirljiva
- Korekcija boje i kosinus-korigirana leća (prema C.I.E.)
- Veliko područje do 100.000 luksa
- Jednostavna korekcija nule
- Veliki LCD-Display garantira dobru očitljivost i kod loših mjernih uvjeta
- Manualan odabir područja
- RS-232 sučelje
- Min- / Max-Hold-funkcija
- Data Hold-funkcija
- Auto-Power-Off funkcija (isključiva)
- ABS-sintetičko kućište
- Isklopivi stolni stativ
- Moguća montaža na stativ

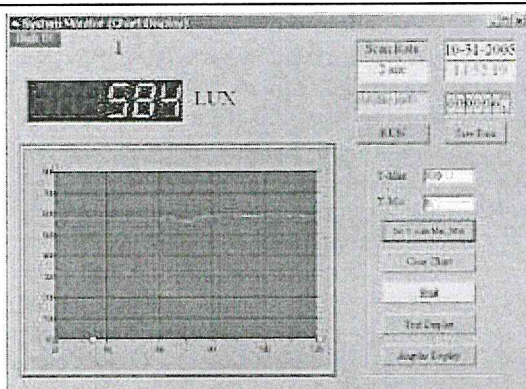

Slika lijevo prikazuje software za luksometar PRO-2005LX koji se nalazi u opsegu isporuke sa njegovim različitim mogućnostima podešavanja i analiziranja.

PROBUS u Hrvatskoj	PROBUS u Srbiji	PROBUS u Bosni i Hercegovini
PROBUS K. I.G. d.o.o. Kutinska 15, Novo Selo Palanječko HR-44202 SISAK-Topolovac Tel.: +385-(0)44-743 190 Fax: +385-(0)44-743 191	PCE Grupa d.o.o. Kolarova 17 SRB-21470 Bački Petrovac Tel.: +381-(0)21-782 612 Fax: +381-(0)21-780 625	PCE Grupa d.o.o. Derviša Numića 50 BiH-71000 Sarajevo Tel.: +387-(0)33-713 445 Fax: +387-(0)33-713 446

Tehničke specifikacije			
Područja	Područje [luks]	Display [luks]	Rezolucija [luks]
	200	0...199,9	0,1
	2.000	180...1.999	1
	20.000	1.800...19.990	10
100.000	18.000...100.00	100	
Točnost	± 4% + 2 digita		
Senzor za svjetlo	Silikon-fotodioda		
Odabirljivi izvori svjetla	- dnevno svjetlo - cijevi sa plemenitim plinom - lampe sa natrijevom parom - lampe sa živinom parom		
Spremnik podataka	16.000 vrijednosti		
Interval pospremanja podataka	podesivo između 2 sekunde i 8h 59min 59sec (~ 9 sati)		
Sučelje	RS-232		
Software	CD-ROM (engleski)		
Prikaz	LCD-display, 58 x 34 mm		
Radni uvjeti	0 ... 50 °C / < 80 % r.H.		
Napajanje	4 x AA-baterije (za uređaj) ili preko 9V-ispravljača CR2032 ćelija (za interni sat)		
Dimenzije	Uređaj: 205 x 76 x 37 mm (HxBxT) Senzor: 85 x 55 x 12 mm (HxBxT)		
Masa	406 g uklj. baterije		
Opseg isporuke 1 x Luksometar PRO-2005LX sa internim spremnikom podataka, 1 x senzor za svjetlo i kabel, 1 x software, 1x RS-232 kabel za sučelje, 1 x baterija, uputstvo			
dodatno - USB-adapter (konvertor sa RS-232 na USB-priključak) - Ispravljač - ISO 9000 kalibracijski certifikat			

PROBUS u Hrvatskoj	PROBUS u Srbiji	PROBUS u Bosni i Hercegovini
PROBUS K. I.G. d.o.o. Kutinska 15, Novo Selo Palanječko HR-44202 SISAK-Topolovac Tel.: +385-(0)44-743 190 Fax: +385-(0)44-743 191	PCE Grupa d.o.o. Kolarova 17 SRB-21470 Bački Petrovac Tel.: +381-(0)21-782 612 Fax: +381-(0)21-780 625	PCE Grupa d.o.o. Derviša Numića 50 BiH-71000 Sarajevo Tel.: +387-(0)33-713 445 Fax: +387-(0)33-713 446